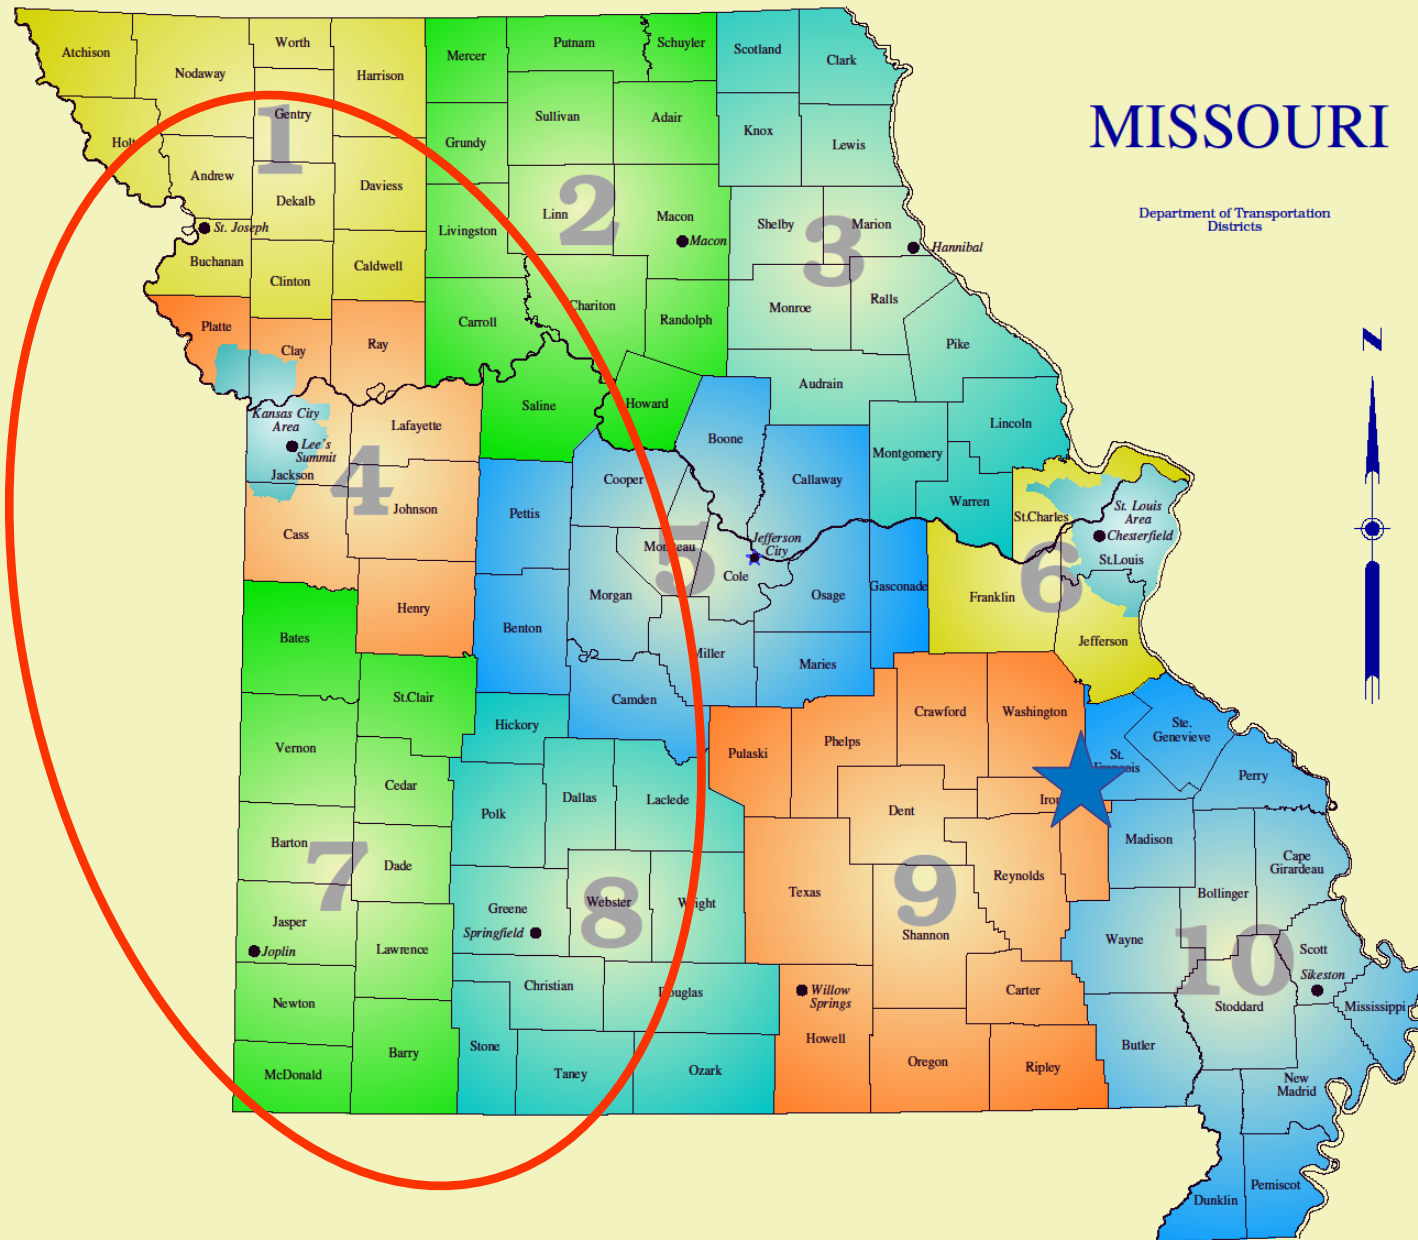


Use of Mine By-products in Missouri's Hot Mix Asphalt

The Missouri Department
of Transportation

MISSOURI

Department of Transportation
Districts

Section 1001.12

- Tested by Approved Laboratory
- Individual Stockpiles ≥ 5000 cu. yd.
- Unbound Application
 - Leachable Lead > 3.0 ppm
 - Total Lead > 500 ppm
- Bound in Concrete or Asphalt
 - Total Lead > 4500 ppm
- No Testing for Reused Mixture

Administration

■ All Records Maintained by Southwest District Construction and Materials

District Construction and Materials Engineer
Southwest District Headquarters
3901 East 32nd Street
Joplin, Missouri 64804
417-621-6500

A large, faint, blue watermark of the word "MODOT" is visible in the background, with the letters "M", "O", "D", "O", and "T" spanning across the top and middle of the image. Below the text, there are several concentric, curved lines in a lighter shade of blue, resembling a stylized road or a signal wave.

For More Information:

www.modot.org

1 888 ASK MODOT